

Rotational clarifier

Textile Industry

APPLICATION:

- Treatment of colour wastewater from textile dyeing, retention of lints and fibres

PROCEDURE:

- Screen drum with perforation 0,25 mm retains textile fibres

REALISATION: 2022

LOCATION: Germany




Collection container of lints and fibres

Parameter/Technical data	
Temperature	90 °C
pH	4 - 9
Flow rate	10 m ³ /h
Separation limit screen drum	0,25 mm
Installed power	2,0 kW



Touch panel

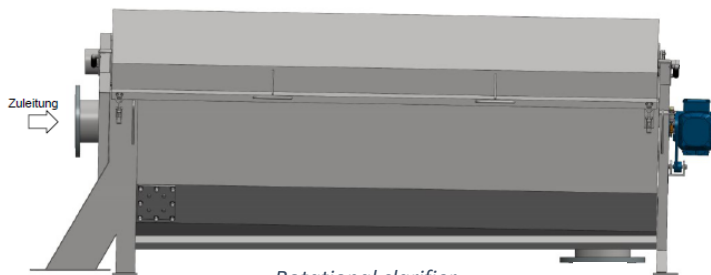

Rotational clarifier



Overview of the plant



Placement by the customer